


Power Control Panel

Configuration / order form

PCP-12dd

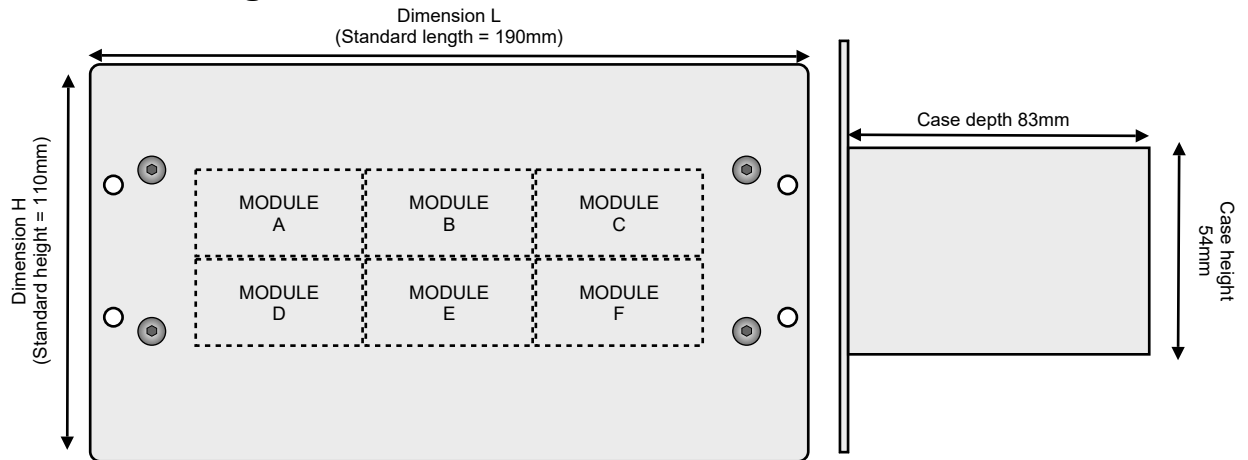

2 Button / 2 Channel (8A / 16A)

Tick to select

MODULE A:	<input type="checkbox"/>	Pushbutton colours: _____	Text: _____	Text: _____	Function: _____	Function: _____
MODULE B:	<input type="checkbox"/>	Pushbutton colours: _____	Text: _____	Text: _____	Function: _____	Function: _____
MODULE C:	<input type="checkbox"/>	Pushbutton colours: _____	Text: _____	Text: _____	Function: _____	Function: _____
MODULE D:	<input type="checkbox"/>	Pushbutton colours: _____	Text: _____	Text: _____	Function: _____	Function: _____
MODULE E:	<input type="checkbox"/>	Pushbutton colours: _____	Text: _____	Text: _____	Function: _____	Function: _____
MODULE F:	<input type="checkbox"/>	Pushbutton colours: _____	Text: _____	Text: _____	Function: _____	Function: _____

Select: (Standard) **BLACK**

(Options) **YELLOW, RED, GREEN, WHITE**

1 Button / 1 Channel (8A / 16A / 24A / 32A)

Tick to select

MODULE A:	<input type="checkbox"/>	Pushbutton colour: _____	Text: _____	Function: _____
MODULE B:	<input type="checkbox"/>	Pushbutton colour: _____	Text: _____	Function: _____
MODULE C:	<input type="checkbox"/>	Pushbutton colour: _____	Text: _____	Function: _____
MODULE D:	<input type="checkbox"/>	Pushbutton colour: _____	Text: _____	Function: _____
MODULE E:	<input type="checkbox"/>	Pushbutton colour: _____	Text: _____	Function: _____
MODULE F:	<input type="checkbox"/>	Pushbutton colour: _____	Text: _____	Function: _____

Select: (Standard) **BLACK**

(Options) **YELLOW, RED, GREEN, WHITE**



Example PCP-12dd

Functions available:

(1Ch or 2Ch modules)

- FUNCTION 1 = Latching with NO memory
- FUNCTION 2 = Latching with memory
- FUNCTION 3 = Momentary
- FUNCTION 4 = Always on
- FUNCTION 5 = Latching with 30sec delay
- FUNCTION 6 = Latching with 2min delay
- FUNCTION 7 = Latching with 5min delay
- FUNCTION 8 = Latching with 10min delay

(2Ch modules only)

- FUNCTION 9 = Flashing indicators (Left / right direction + hazard)
- FUNCTION 10 = Head Lamps, 16A each channel (Hi-beam + lo-beam toggle)
- FUNCTION 11 = Head Lamps, 16A each channel (With Steering wheel input)
- FUNCTION 12 = Wipers, 16A each channel (Hi-speed + lo-speed with park signal input)
- FUNCTION 13 = Wipers, 16A each channel (Hi-speed + lo-speed with park signal input + wash signal input)
- FUNCTION 14 = Fuel Pumps, 16A each channel (2x pumps + ECU control)

(Non electronic functions)

- FUNCTION 98 = Fire Extinguisher Button
- FUNCTION 99 = Battery Isolator Button

Custom functions available on request.